

ATEX SAFETY TORCH with LED





- ATEX certified for explosive gas and dust approval
- High output LED light source
- Duration up to 27 hours from 2 x 1.5V D cells LR20
- T4 temperature class
- IP67 dust and watertight
- Low battery indicator
- Simple, robust design
- Straight and right-angle versions
- Single handed switching
- LED module can be retro-fitted to T4 bulb torches



TR-30+ & TS-30+

70 lumen beam (approx 5°)
Peak luminous intensity at 1m, **8600 lux**
Peak luminous intensity at 5m, **291 lux**

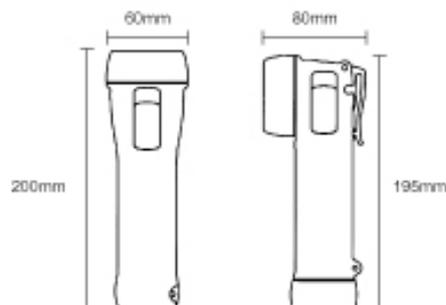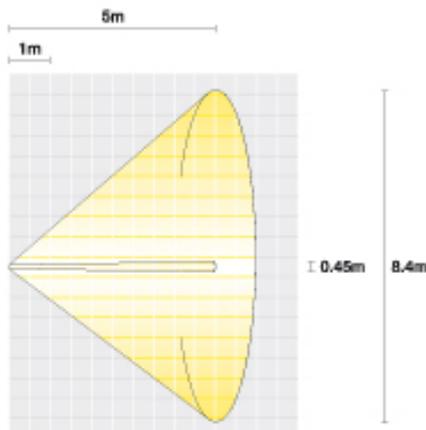

ATEX Safety Torch with LED gives reliable, simple, cost effective, high output LED performance in a straight or right-angle body style.

The TR-30+ and TS-30+ torches, incorporating the TP-300 'Torch LED Module', give an exceptional output of up to four times more light than an incandescent torch bulb, generating a piercing white spot beam combined with a wide angle flood of fringe light, for excellent visibility in conditions of darkness or reduced visibility.

With a typical life of over 25,000 hours, the TP-300 LED is expected to last the product lifetime, minimising product maintenance and eliminating risk of light source failure. Additionally the highly efficient LED technology gives an increased battery duration of up to 27 hours from a set of two alkaline 'D' cells, more than twice the duration from a conventional safety torch using the same cells.

The TP-300 LED module incorporates a low battery indicator, emitting a flashing red LED signal to

show good battery power and correct torch function, changing to a static red LED signal to warn of 'low battery' power. After several hours in the 'low battery' phase, the light will cut out.

The ATEX Torch range is CE marked compliant with the 94/9/EC ATEX Explosive Atmospheres Equipment Directive. Certification to the latest standard is for use in potentially explosive gas, vapour and mist atmospheres, zones 1 and 2, temperature class T4. Dust ignition protection covers use in zones 21 and 22, with the certified maximum surface temperature of 95°C. Temperature ambient of use is from -20°C to a maximum of +40°C or 55°C with certain cells as specified in the instructions.

The compact TS-30+ and TR-30+ Torch bodies, in straight or right-angle forms, have an enhanced ergonomic design for easy grip and single handed switching, even with gloved hands. The torch bodies offer high strength and proven impact resistance, even at sub zero Temperatures, using carefully selected

thermoplastic resins with excellent chemical resistance. Additionally, the rubber armoured lens ring and end cap give enhanced grip and shock protection. The shatterproof polycarbonate lens has a scratch and chemical resistant coating.

ATEX Torches are sealed dust tight and protected from water immersion with a certified IP67 enclosure. The right angle model incorporates a replaceable high strength thermoplastic belt clip for hands-free use. Both models allow straightforward battery replacement. All models are supplied with wrist straps.

As well as for use in the TR-30+ and TS-30+ torches, the TP-300 'Torch LED Module' can be 'retro-fitted' by the user into the ATEX Safety Torch T4 models including; TR-24, TR-24+, TS-24 or TS-24+ to bring these same improvements to ATEX T4 torches already in use.

ATEX Safety Torch with LED			
Technical Specification			
Model		TS-30+	TR-30+
Description		ATEX Safety Torch with LED, Primary Cell Powered	
		Straight T4 LED Torch with Indicator	R/Angle T4 LED Torch with Indicator
Code	ATEX	Ex II 2 GD Ex e ib IIC T4 Gb (Ta=40/55°C) Ex tb IIIC T95°C Db (Ta=55°C)	
Type of protection		Increased safety, intrinsic safety	
Area of class. (gas)		Zones 1 & 2, Gas groups IIA and IIB, IIC	
Max surface temp (gas)		T4	
Ambient temp (gas)		-20°C to +40°C/+55°C	
Area of class. (dust)		Zone 21 and 22	
Temp. class. (dust)		95 °C	
Certificate		BAS02ATEX2220X	
Enclosure		Impact resistant thermoplastic resin, electrostatic non-hazardous	
Lens		Polycarbonate, impact resistant with hard coat	
Beam type		Medium Spot	
Light source:	Pt. no.	TP-300	
	Power	Torch LED Module	
	Output	70 lm	
	LED Life	25,000 hrs plus	
Power source:	Pt. no.	2 x H-20 (LR20)	
	Battery type	LR20 primary cells to IEC60086	
	Volts	2 x 1.5v	
Light duration		up to 22 hours to low power indicator up to 27 hours total	
Ingress protection		IP67	
Weight (incl. cells)		2475g	500g

Note: All information has been gathered under laboratory conditions, the user must regard the values given as approximate.